

FIG. 1 (Prior Art)

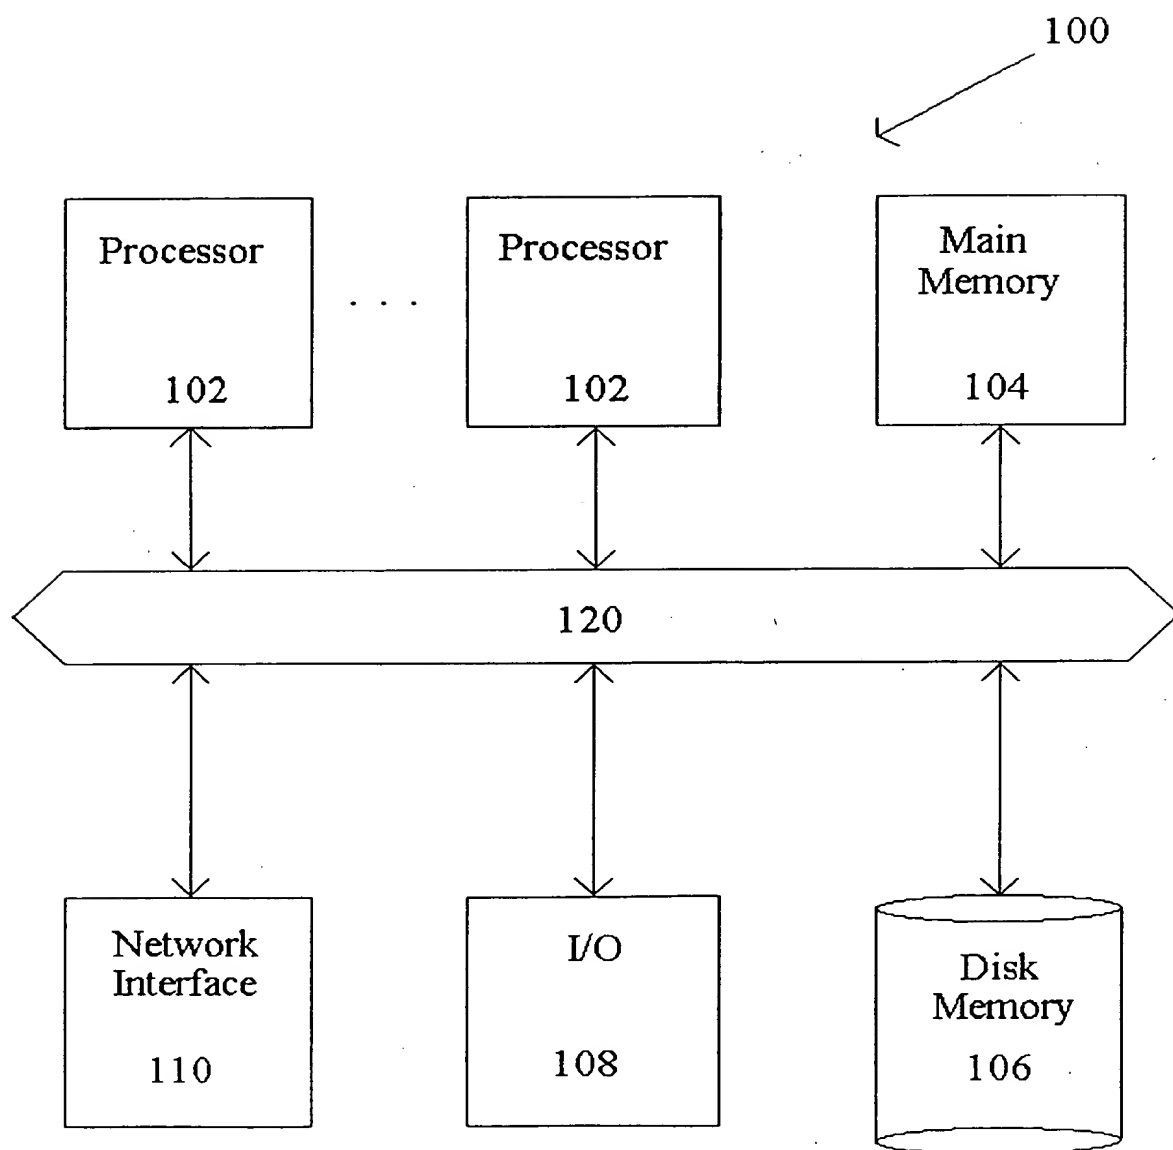


Fig. 2 (Prior Art)



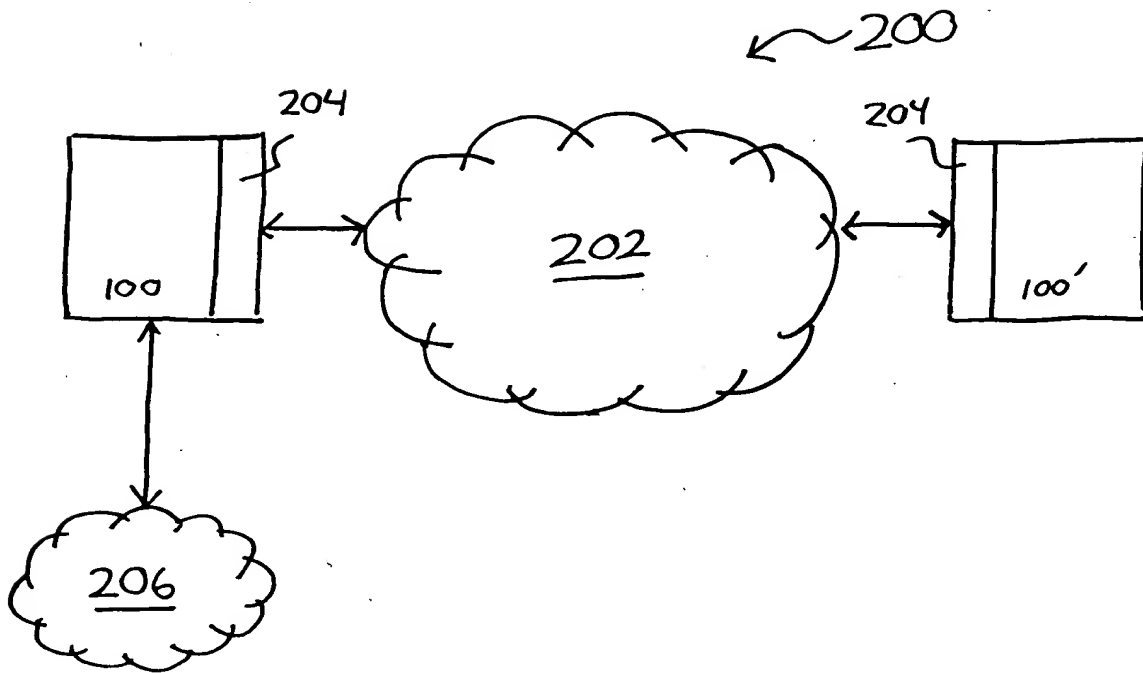


Fig. 3

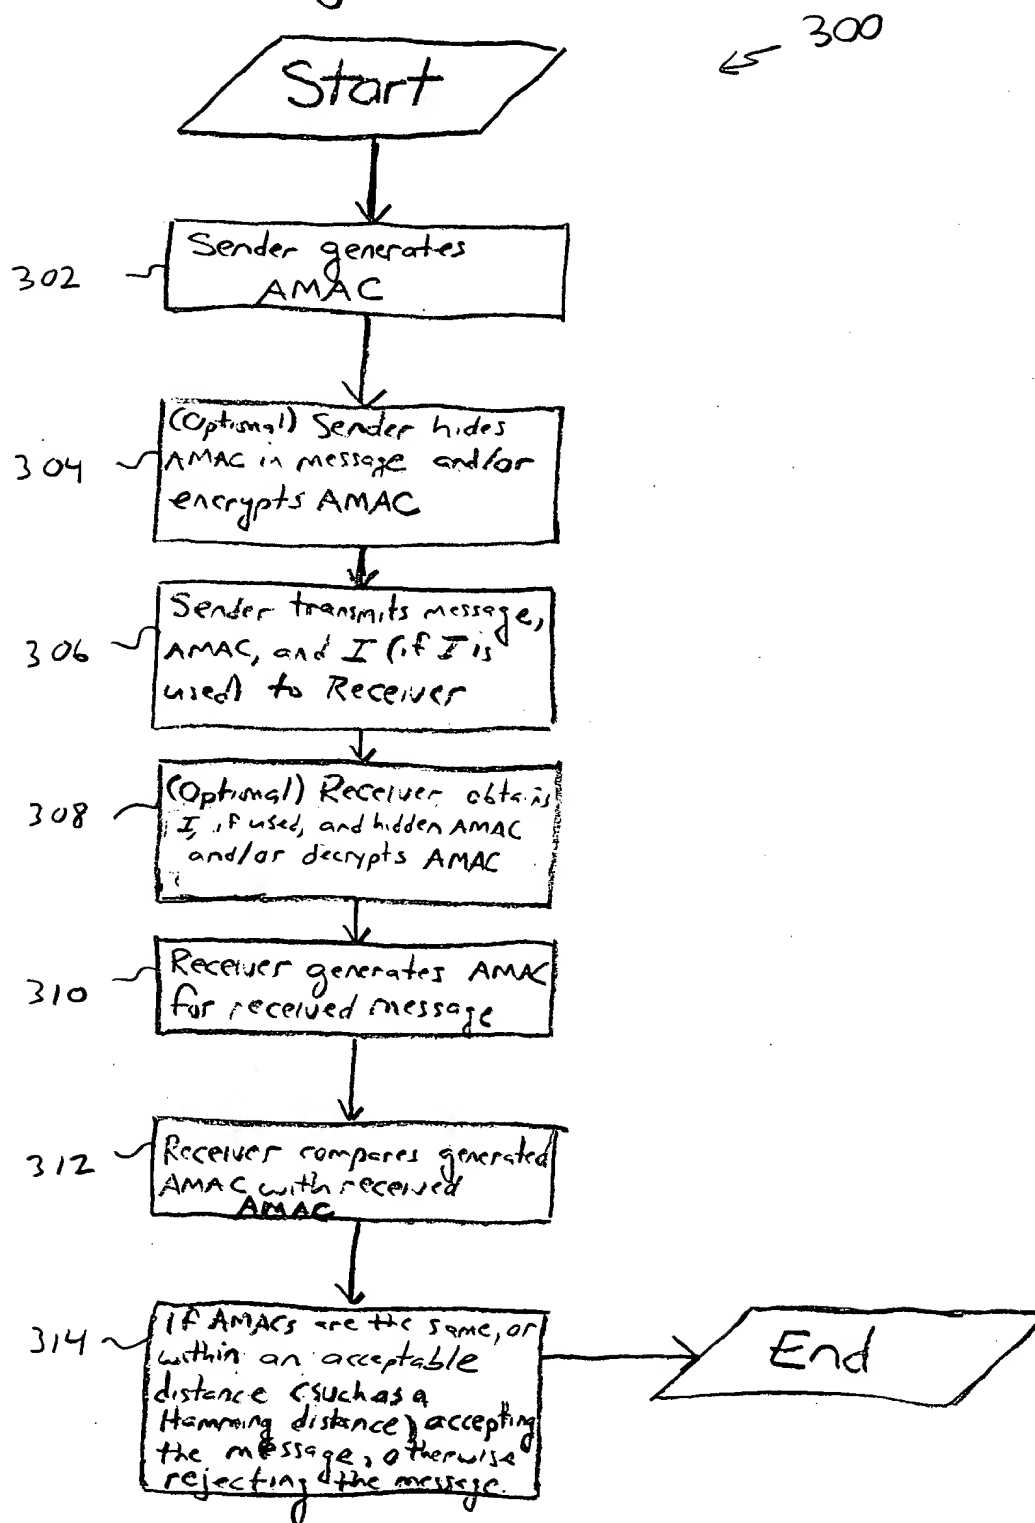

4/11

Fig. 4A

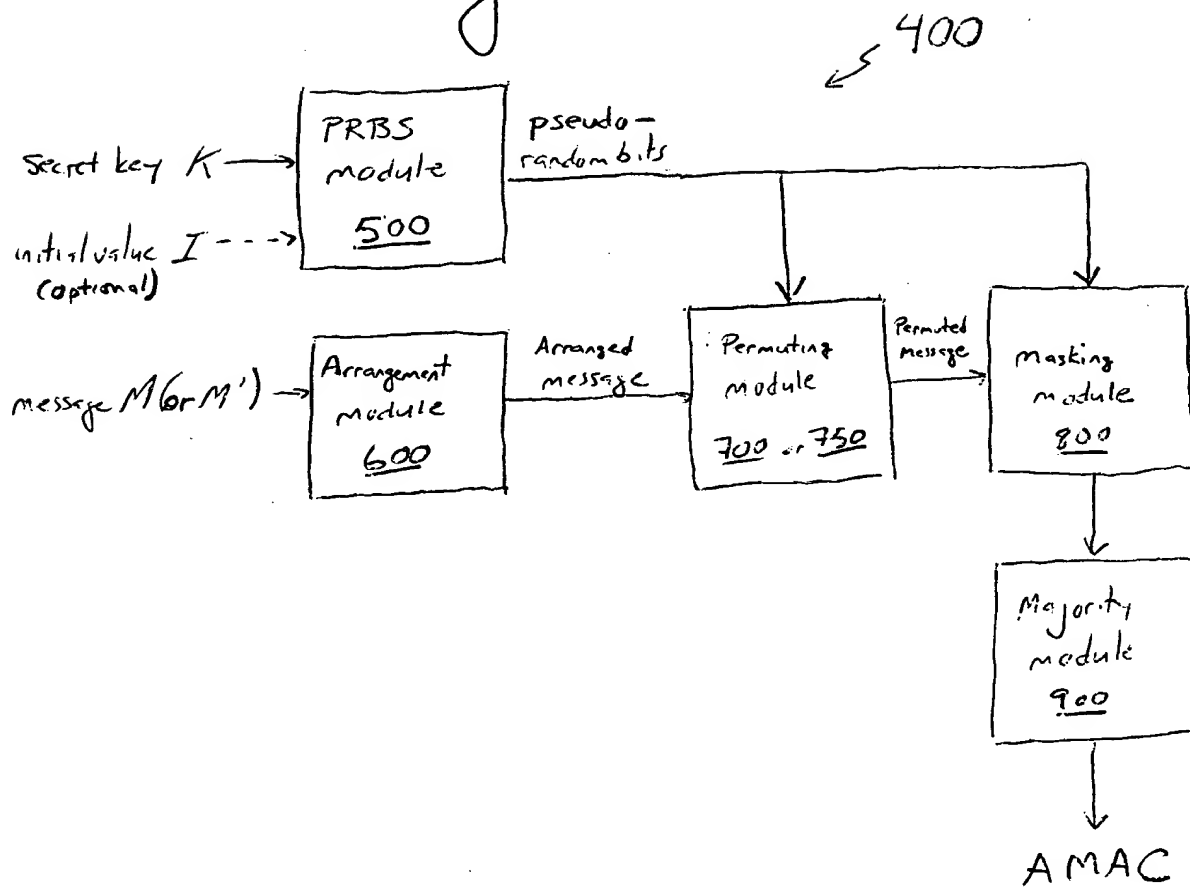

660121-9EE85460

Fig. 4B

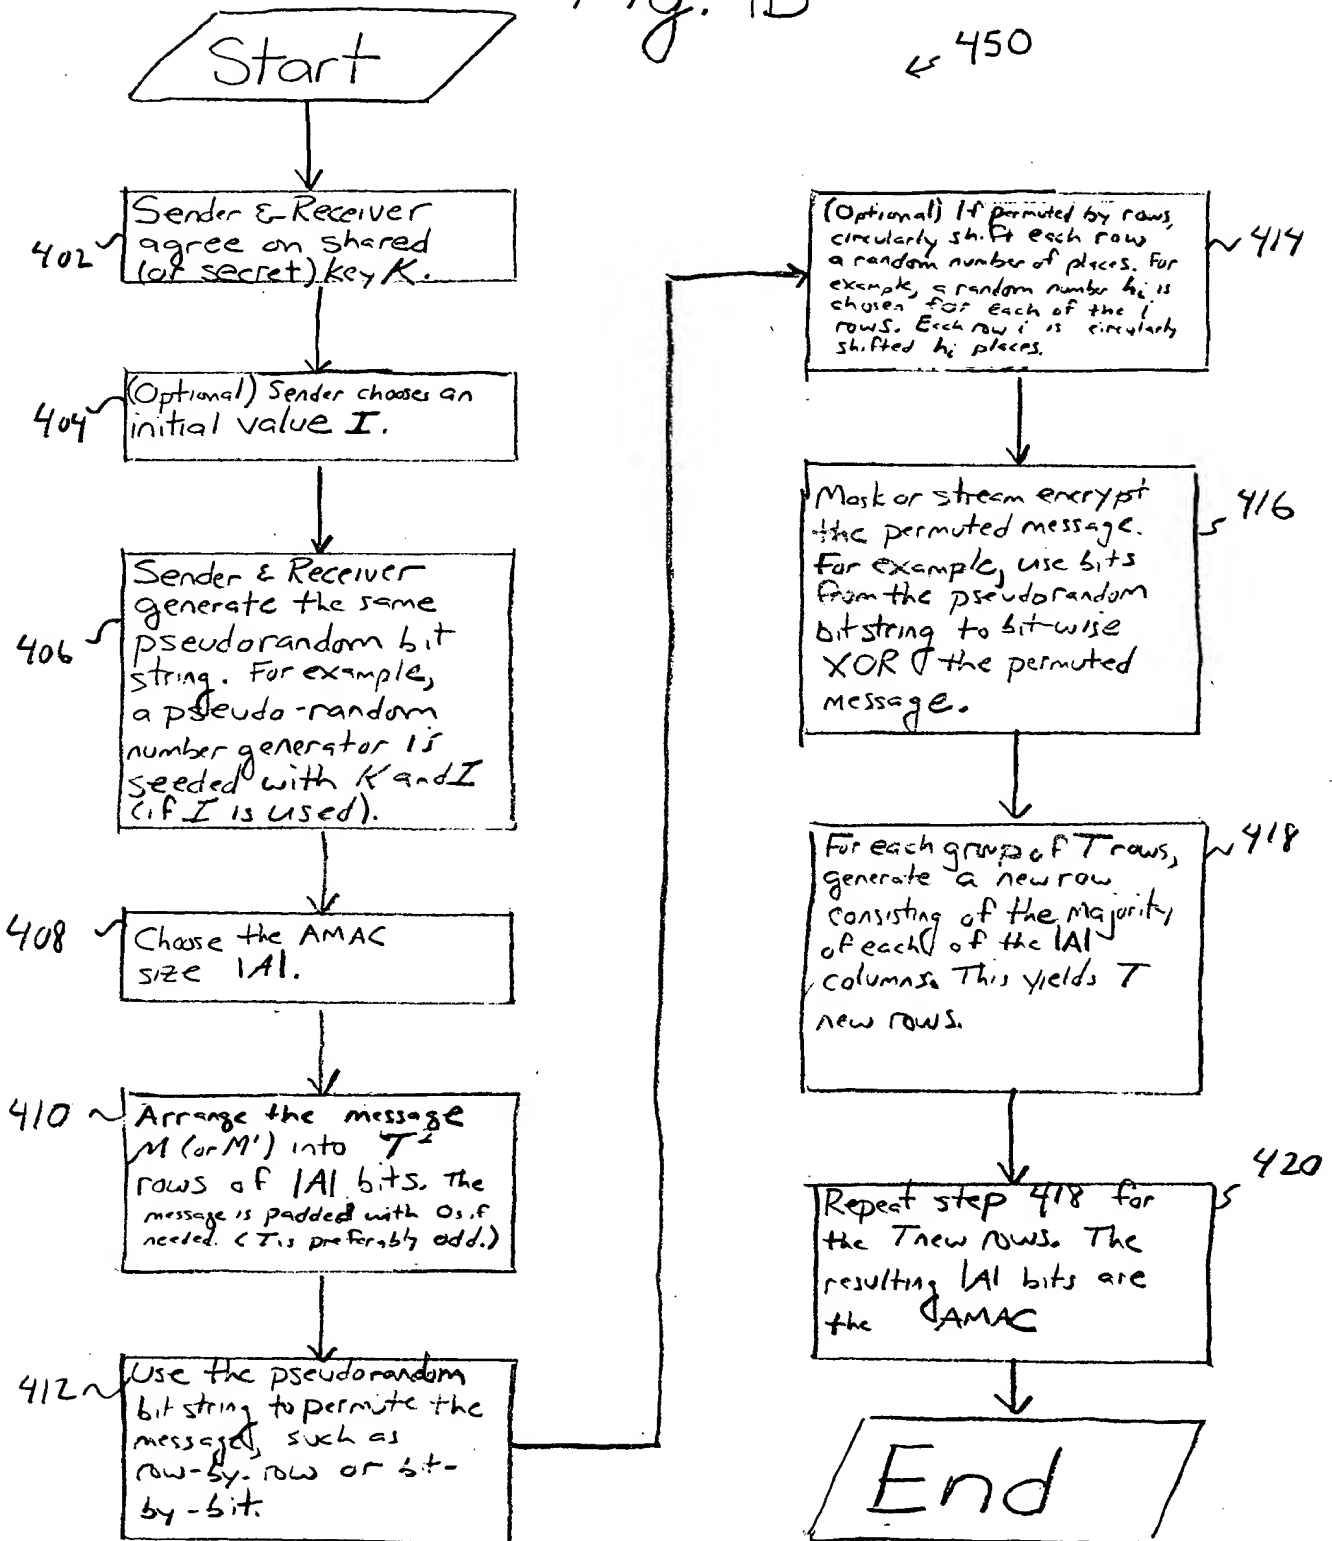


Fig. 6

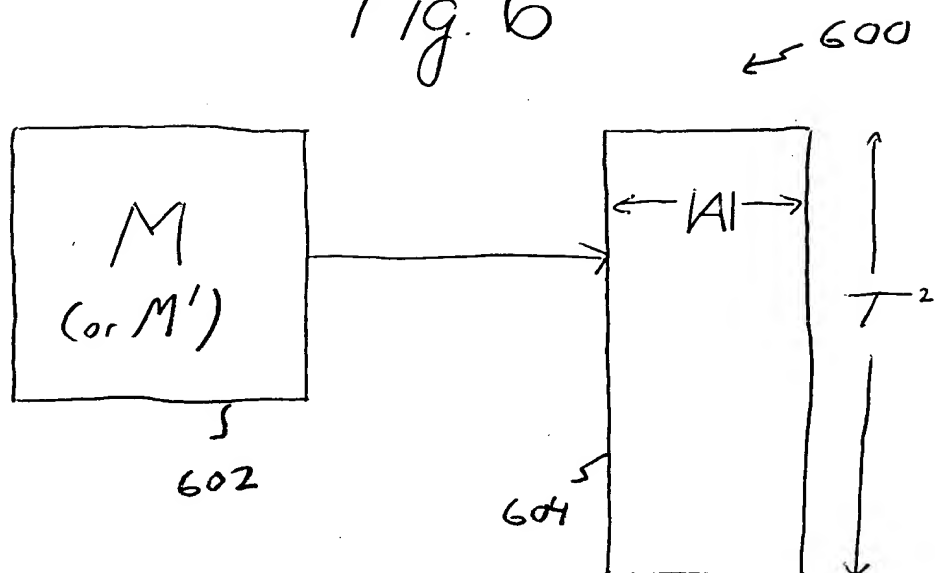


Fig. 5

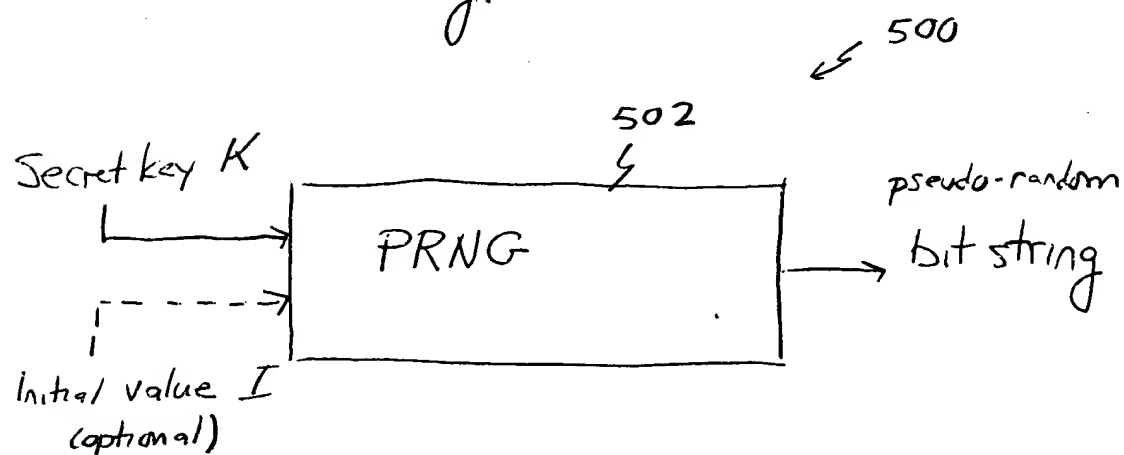


Fig. 7 A


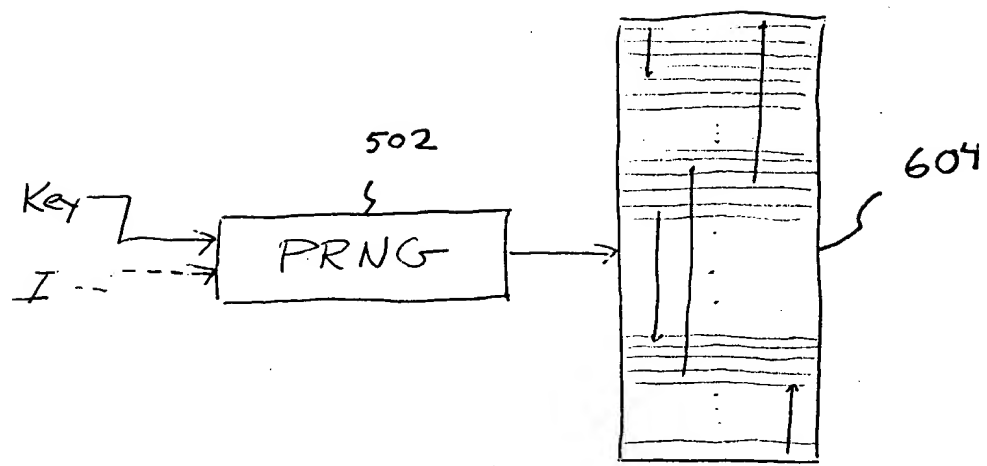


Fig. 7 B

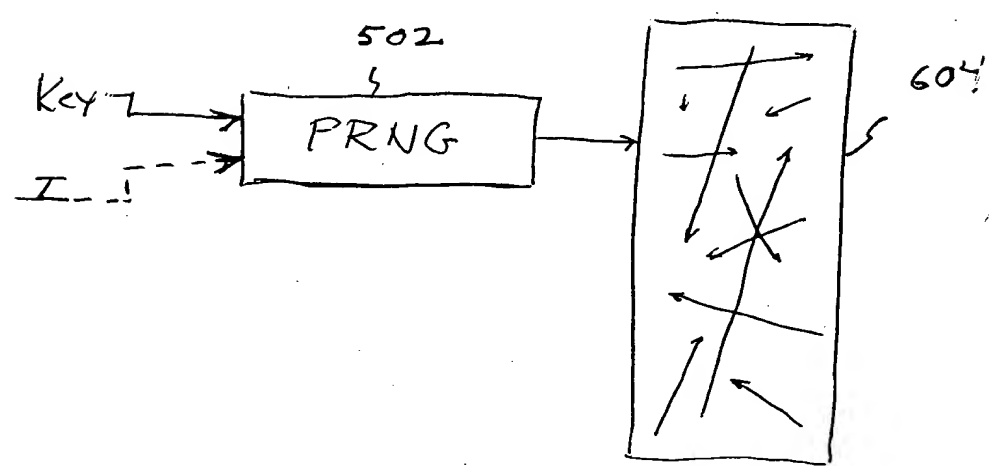

660221-9225460

Fig 8



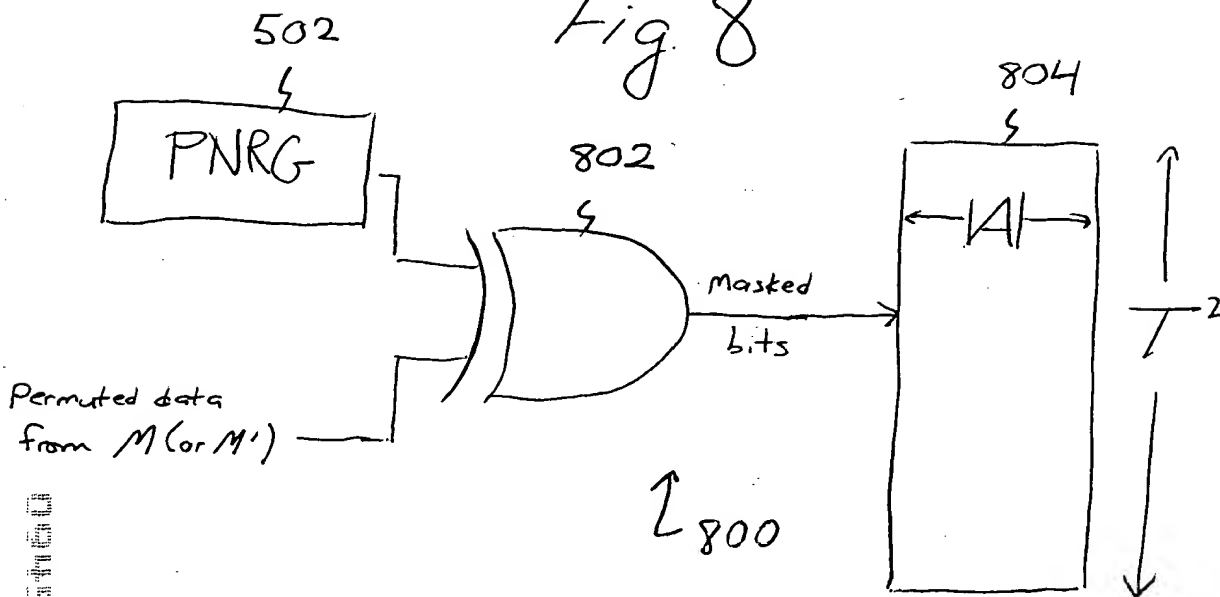


Fig 9

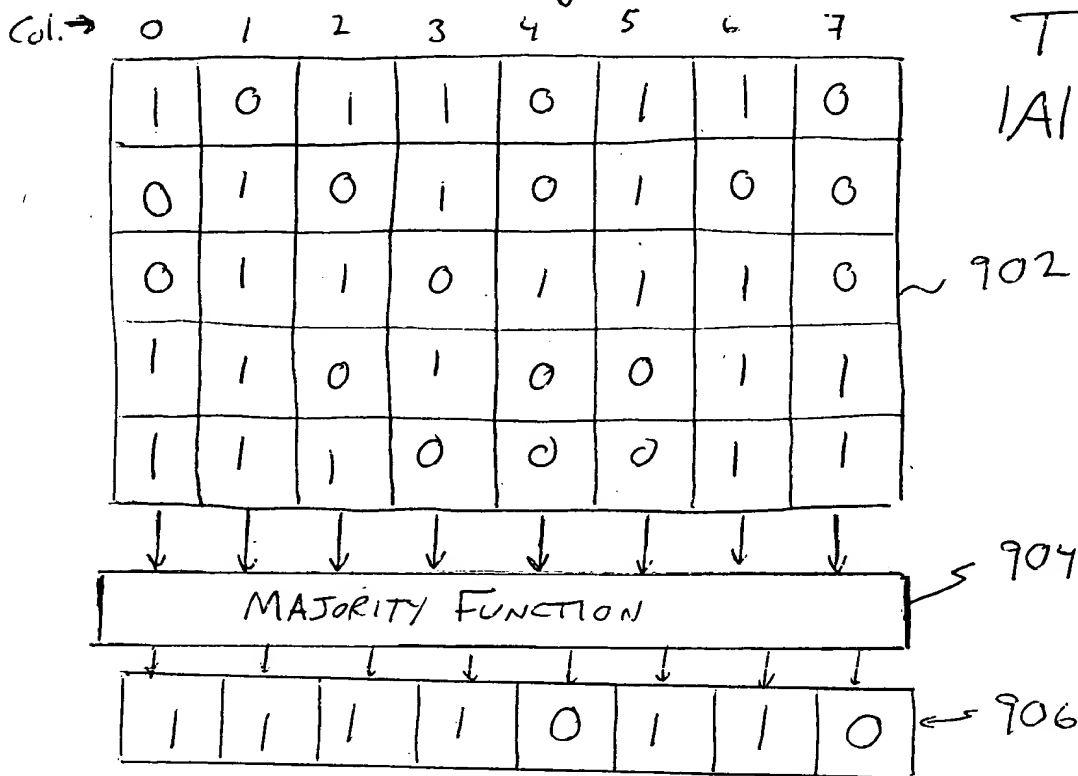

9/11

Fig. 10A

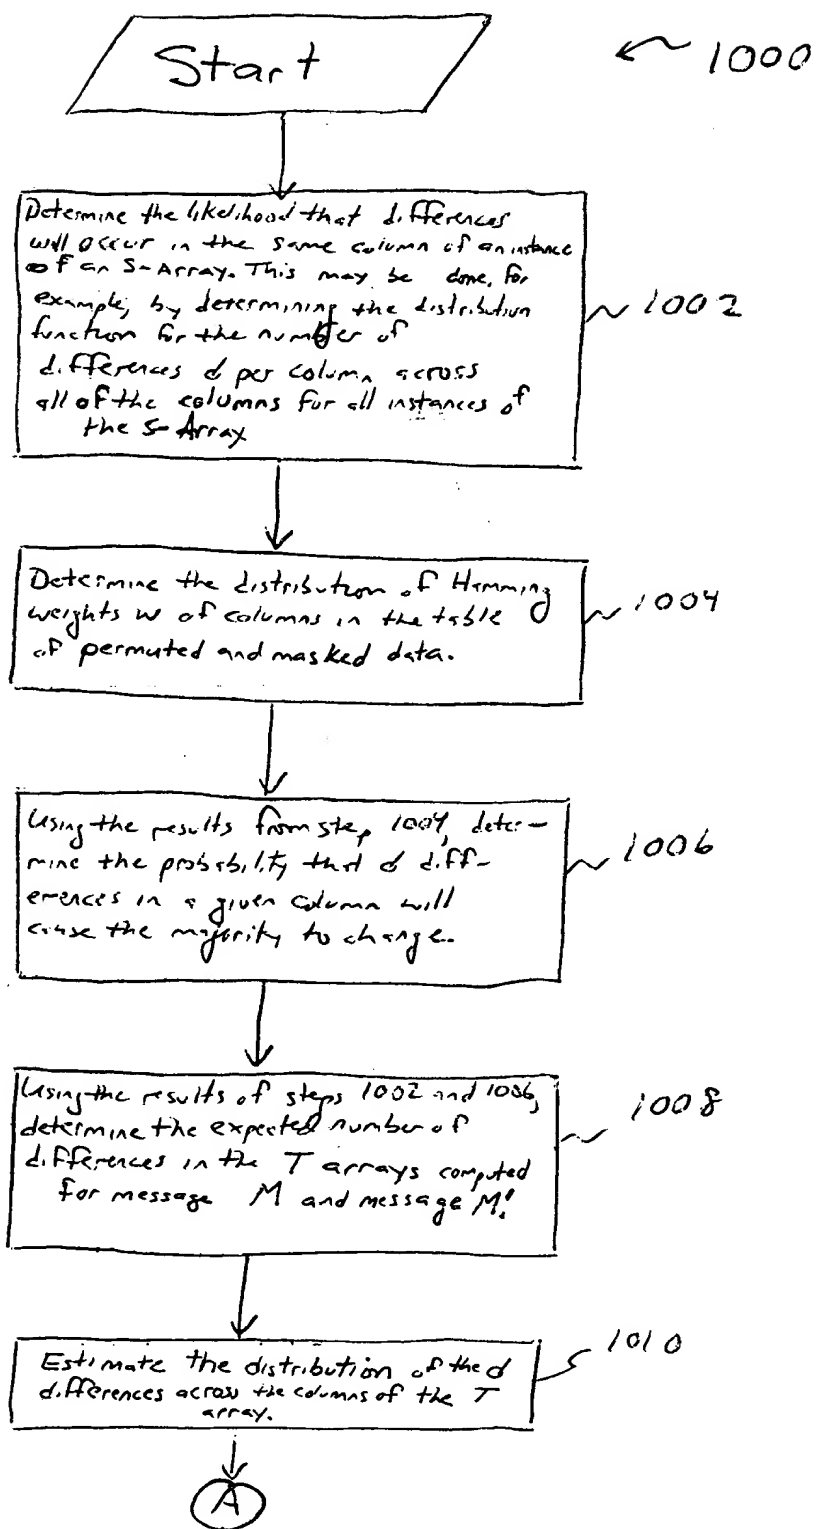

2025 RELEASE UNDER E.O. 14176

Fig. 10B


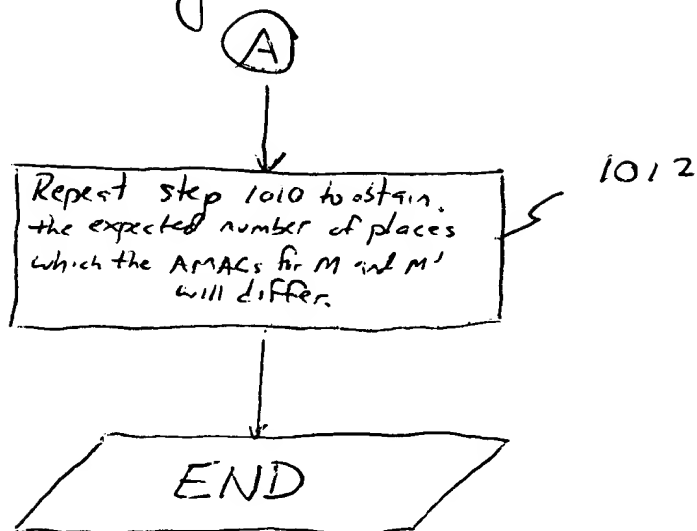


Fig. 11
 00111 9EE5460
 ~1100

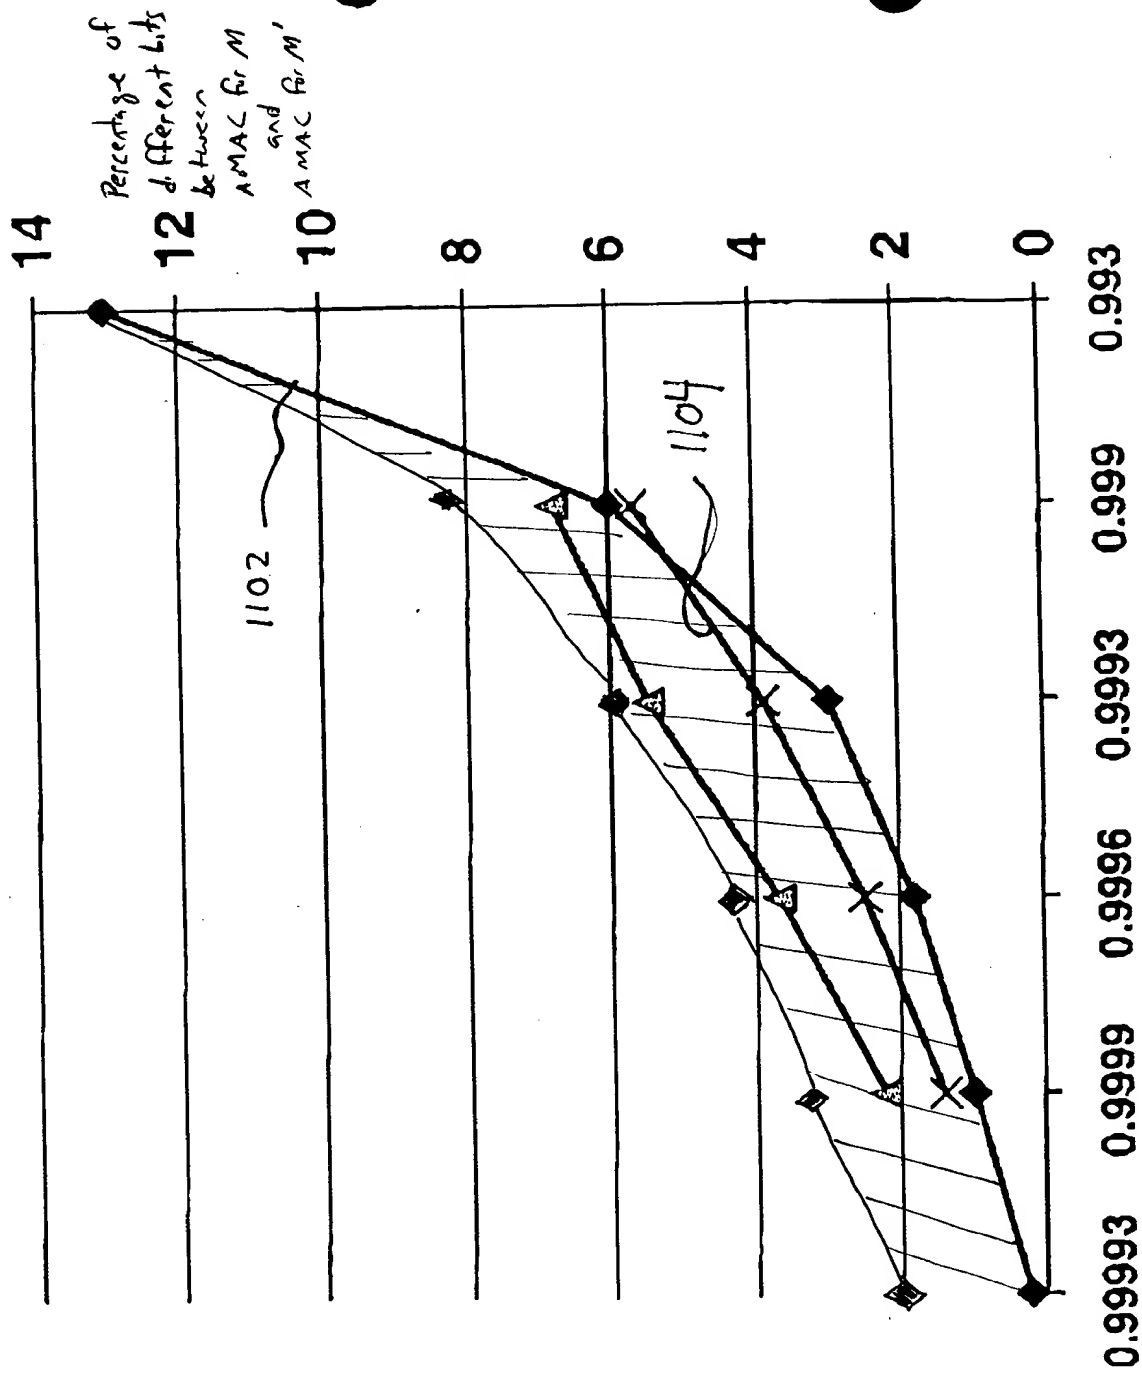

Desired behavior
 Simulated behavior
 Projected behavior

Percentage of identical bits between message M and message M'